

'PPF9'

POSITIVE INPUT VENTILATION

for small/medium/large domestic properties

- Whole House Ventilation System
- Low Noise Levels
- Extremely Low Running Costs
- Quick Fit Installation
- Available with Heater
- Reduces Radon
- Helps Stop Condensation
- 2 Year Guarantee




GENERAL FEATURES

- Positive pressure ventilation provides effective, draught free ventilation, prevents condensation forming and reduces radon.
- Easy to install - the PPF9 can be used both in the refurbishment of older properties where condensation is a particular problem as well as in new build.
- The PPF9 introduces tempered air, drawn in through the loft, to create a positive pressure in the building.
- Tempered, filtered, fresh air enters the living areas from the fan, via a short length of flexible ducting, through a discreet ceiling mounted diffuser.
- The fresh air circulates throughout the building giving draught-free ventilation eventually dissipating through openings around the property
- The PPF9 runs continuously to provide a constant background air change and maintain a healthy and comfortable environment.
- Since the moisture content of the air outside is normally lower than that in doors, the level of humidity is reduced, helping to eliminate the damaging effects of condensation.
- A PPF9 provides extra security - there is no need to open windows.
- The noise levels are extremely low.
- The system is very economical and can cost less than £5 per year to run.

Typical Specification

Supply and install a PPF9 positive pressure fan supplied by Vectaire Ltd, Lincoln Road, Cressex Business Park, High Wycombe, Bucks, HP12 3RH. This unit should be designed for easy loft installation and be able to provide effective, draught free ventilation by introducing tempered air drawn in through the loft and creating a positive pressure in the building. The indrawn air is then dissipated through openings around the property, thus providing a constant, background air change. The fan should have a choice of three speeds on installation and run automatically at that level (chosen according to the size of the building). The fan should be supplied with a ceiling valve, flexible ducting, worm drive clips and attenuation mounts. The fan should comply with all current IEE, EC and Building Regulations requirements and also be BRE Digest 398 compliant.

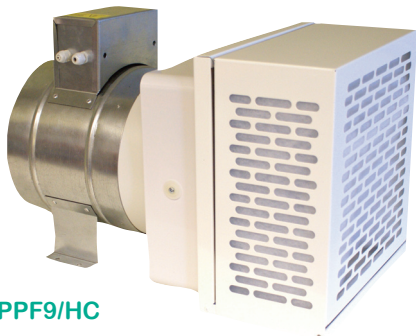

PPF9/HC

TECHNICAL FEATURES

- For small, medium or large domestic properties
- Easy loft installation
- Choice of 3 speed levels (set at installation)
- Robust construction - fan casing is an integral, one piece unit with a filter box attached.
- Air inlet is provided on all sides of the unit
- Incorporates a specially developed fan/motor assembly
- Motor mounted on sealed, self-lubricating bearings
- Protected with thermal cut-out
- Double insulated
- Maximum ambient temperature 40°C
- Complete with ceiling diffuser, flexible duct, worm drive clips, plasterboard fixings and screws and attenuation mounts
- Easy to maintain - motor and fan blades should be checked after every six months of service. Filters can be cleaned but should be replaced every two years.
- 2 year warranty - 1 year parts and labour, 1 years parts only

Vectaire offers a design service to ensure that the unit installed is the best possible to provide efficient, effective, low energy and low running cost ventilation. Vectaire can also organise installation, commissioning and maintenance of these products

COMPLIES WITH

- Part L1 2013 of Building Regulations for enhanced energy saving capability
- Part F 2013 of Building Regulations for reliable, efficient ventilation
- EU RoHS Directive Compliant.
- Conforms to requirements of EC Council directives relating to Electromagnetic Compatibility and Electrical Safety: 2006/95/CE (LVD), 2004/108/CE (EMC), EN 60335-2-80
- CE marked

AVAILABLE MODELS

PPF9 - positive pressure supply fan

PPF9/HC - positive pressure supply fan with in-line duct heater

MODEL	PPF9	
Supply	230v, 50Hz	
Weight	7 kg	
Extract Capacity	Speed 1	50m ³ /hr, 14 l/s
	Speed 2	83m ³ /hr, 23 l/s
	Speed 3	94m ³ /hr, 26 l/s
Power	Speed 1	7 watts
	Speed 2	15 watts
	Speed 3	19 watts
Sound Level	Speed 1	20 dBA
	Speed 2	25 dBA
	Speed 3	30 dBA
performance figures measured with filter, flexi-ducting and air valve in place		
IN DUCT HEATER - 300 watts		
Temp-erature rise at:	Speed 1	11.5°C
	Speed 2	7.5°C
	Speed 3	7.2°C

Cold Incoming Air
Warm Incoming Air
Tempered Air
Stale Air

Extract from BS5252:1991
Section 4.5
Control of internal humidity



Vectaire Ltd

Lincoln Road
Cressex Business Park
High Wycombe
Buckinghamshire
HP12 3RH

Tel: +44(0)1494 522333
Fax: +44(0)1494 522337

Email: sales@vectaire.co.uk
Web: www.vectaire.co.uk

